



CONFIGURATION

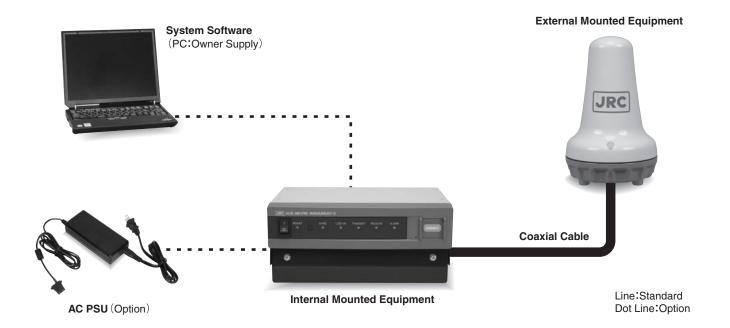

SPECIFICATION

Frequency Range	TX RX GPS	1626.5 ~ 1646.5 MHz 1530.0 ~ 1545.0 MHz 1575.42 MHz ±1MHz
Channel Spacing	5KHz	
Output Power	E.I.R.P. +7~+16 dBW	
Receiving Performance	G / T (EL=5 Deg.) -23.7 dB / K以上	
Modulation	TX RX	1200 symbols / sec. BPSK 1200 symbols / sec. BPSK
Data rate	TX RX	600 bps 600 bps
Communication	Telex / Packet / Data / Fax (TX)	
Power Supply	24V DC +30% -20% 100 / 115 / 220V AC±10% (Option)	

DIMENSIONS



• Specifications may be subject to change without notice.

For further information, contact:



Main Office: Nittochi Nishi-Shinjuku bldg. 10-1, Nishi-Shinjuku 6-chome Shinjuku-ku, Tokyo 160-8328, Ja

Shinjuku-ku, Tokyo 160-8328, Japan Telephone: +81-3-3348-4099 Facsimile: +81-3-3348-4139

Overseas Branches : Seattle, Amsterdam, Athens Liaison Offices : Taipei, Manila, Jakarta, Singapore, Hanoi, Shanghai, Hamburg, New York

ISO9001, ISO14001 Certified